

# SG250HX-20

Multi-MPPT String Inverter for 1500 Vdc System



## HIGH YIELD

- Up to 6 MPPTs with max. efficiency 99%
- 65A per MPPT, adapt to different PV module
- Max 24 inputs, adapt to different DC/AC ratios



## PROVEN SAFETY

- Intelligent DC switch, automatically cut off the fault
- 24h real-time AC and DC insulation monitoring
- IP66 protection, C5 design, adapt to all kinds of harsh environment
- Smart-cooled and dedusted fan with IP68 protection, low temperature rise, long lifecycle



## LOW COST


- Q at night function, save investment
- Power line communication (PLC)
- Smart IV Curve diagnosis, active O&M




## GRID-FRIENDLY

- SCR $\geq$ 1.1 stable operation in extremely weak grid
- Fastest Reactive power response time 30ms
- Compliant with global grid code

## CIRCUIT DIAGRAM

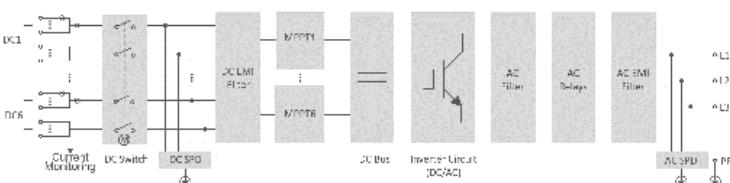

## EFFICIENCY CURVE

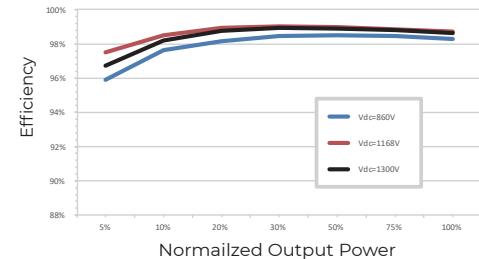

Type designation	SG250HX-20
<b>Input (DC)</b>	
Max. PV input voltage	1500 V
Min. PV input voltage / Startup input voltage	500 V / 550 V
Nominal PV input voltage	1080 V
MPP voltage range	500 V – 1500 V
No. of independent MPP inputs	6
Max. number of input connector per MPPT	4
Max. PV input current	6 * 65 A
Max. DC short-circuit current per MPPT	6 * 100 A
<b>Output (AC)</b>	
Rated output power	250 kW @ 40 °C
Rated AC output current	180.5 A
Max.Apparent power	275 kVA @ 35 °C
Max. AC output current	198.5 A
Nominal AC voltage	3 / PE, 800 V
AC voltage range	640 V – 920 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 Hz – 55 Hz, 60 Hz / 55 Hz – 65 Hz
THD *	< 1 % ( Rated Condition )
DC current injection	< 0.5 % In
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging
Feed-in phases / connection phases	3 / 3
<b>Efficiency</b>	
Max. efficiency / European efficiency	99.02 % / 98.8 %
<b>Protection</b>	
DC reverse connection protection	Yes
AC short circuit protection	Yes
Leakage current protection	Yes
Grid monitoring	Yes
Ground fault monitoring	Yes
DC switch / AC switch	Yes / No
PV String current monitoring	Yes
Q at night function	Yes
Anti-PID and PID recovery function	Optional
Surge protection	DC Type II / AC Type II
<b>General data</b>	
Dimensions (W*H*D)	1148 mm * 779 mm * 371 mm
Weight **	≤ 106 kg
Isolation method	Transformerless
Degree of protection	IP66
Power consumption at night	< 6 W
Operating ambient temperature range ***	-30 °C - 60 °C
Allowable relative humidity range	0 % – 100 %
Cooling method	Smart forced air cooling
Max. operating altitude	5000 m ( > 4000 m derating )
Display	LED, Bluetooth+APP
Communication	RS485
DC connection type	Evo2
AC connection type	Support OT/DT terminal ( Max. 400 mm <sup>2</sup> )
Compliance	IEC 62109, IEC 61727, IEC 62116, IEC 60068, IEC 61683, NBR16149, NBR16150, ABNT NBR IEC62216
Grid Support	LVRT, HVRT,active & reactive power control and power ramp rate control, Q-U control, P-f control

\* Rated Condition: PV input voltage 1080V, AC voltage 800V, AC output power 250kW.

\*\* Due to the multi-supplier for some key components, the actual weight may have a ±8% deviation, please refer to the actually delivered product.

\*\*\*The ambient temperature is determined as the average temperature obtained from at least four evenly distributed temperature monitoring points located at a distance of 1 meter from the equipment, at a height halfway up the machine. The temperature sensors must be shielded from airflow, thermal radiation, and rapid temperature fluctuations to prevent display inaccuracies.

